




## MR<sup>®</sup> 94 UV-YokeR

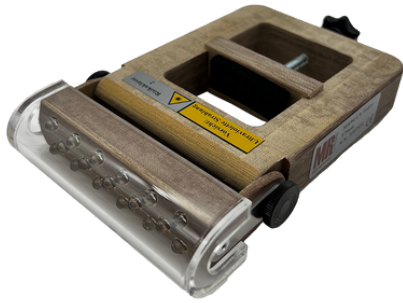

### Product characteristics

- Power supply through magnetic field
- Can be mounted on standard hand magnets
- Excellent light distribution of approx. Ø 120 mm at a distance of 100 mm
- With LED protective glass

### Technical data


Art. no.:	385
UV-LED, risk class acc. to DGZfp/BGFE EM 6:	2
Weight:	217g
Dimensions:	L = 140 mm, W = 95 mm
Max. Clamping size:	50 x 50 mm
Wavelength:	375 nm ± 5 nm
UV LED lifetime:	> 5,000 hrs
Waste heat:	< 30°C
Light distribution:	Distance 10 cm: approx. 120 mm
UVB:	0 W/m <sup>2</sup> .
UVA:	Distance 10 cm: > 25 W/m <sup>2</sup> . Distance 5 cm: > 70 W/m <sup>2</sup> .

\*\*Technical changes reserved!\*\*



## MR<sup>®</sup> 94 UV-YokeR

### Spectrum (Spectral Distribution)

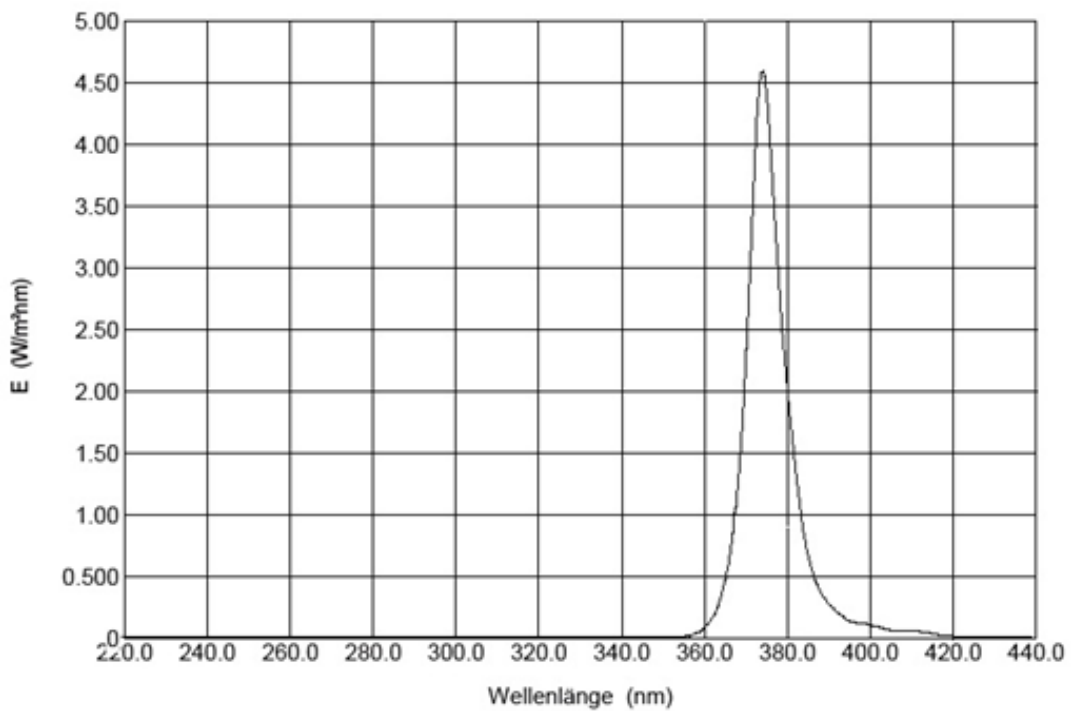

\*\*Technical changes reserved!\*\*