

REFLECON® Tarnish 50 Type 1 - Sublimating



50
500 ml
1L

SUBLIMATING

PRODUCT CHARACTERISTICS

 **≈ 5-8 h**

- Optimized Cyclododecane
- Sublimation time depending on object material & surface and ambient temperature
- Suitable for all materials
- Particularly suitable for large objects thanks to the long sublimation time
- No post-cleaning of the objects
- No dust residue while spraying → protects the fan of the laser equipment


- Solvent reduced and pleasant odor
- Declaration acc. to GHS
- Compatibility test is recommended in advance
- Very good, thin and uniform spray pattern
- Very good adhesion and removability of marker points
- Spray distance 20 – 30 cm

NOTICE

Clean surfaces completely before use (e.g. from dust and other dirt). As soon as the surface is dry, it can be touched - the **REFLECON® Tarnish** then no longer smears. Very good adhesion and removability of the marking dots on the applied film - at average film thickness.

Minimum shelf life: 3 years at storage temperature (5 – 45 °C) for aerosol can and 3 years for container. The state of aggregate changes at a temperature below 5 °C. When the temperature rises above 5 °C, the state of aggregate will normalize.

Available in aerosol can, 500 ml (12 cans/box) and 1L container.

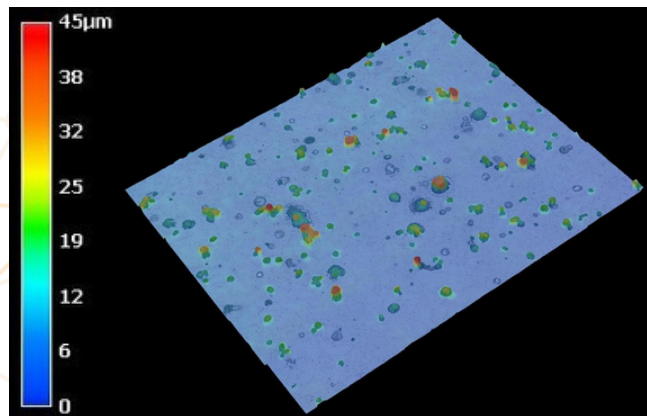

MICROSCOPIC IMAGE OF A SPRAY LAYER

technical changes reserved!

