


## MR<sup>®</sup> 72 LS White Contrast Paint

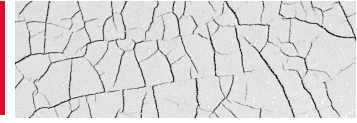

### Product Characteristics

- Solvent-based undercoat paint for magnetic particle testing coloured
- Can be painted over, with 2-component paints, otherwise check compatibility
- Can be welded over, sample seams tested and verified in accordance with DIN EN ISO 5817, quality class B
- Coating thickness can have an influence on the welding result (please check or refer to test report no. 13090 SLV Berlin (26.07.2010) for further information)
- High covering capacity
- Carrier medium: Ketone
- Quick drying

### Minimum shelf life / Temperatures

Aerosol / Bulk:  
3 years at storage temperature  
Storage: + 5 °C - + 45 °C  
Application: - 10 °C - + 50 °C



### Approvals / Specification

- DIN EN ISO 9934-2
- ASME Code V, Art.7, T-731



### Further Information

Process description according to EN ISO 9334-1 on request or on [www.mr-chemie.de/en](http://www.mr-chemie.de/en). For further information see Material Safety Data Sheet and certificate 3.1. For additional equipment please visit our Homepage or contact our sales team.

### Suggested Products

Pre-cleaner: MR<sup>®</sup> 71, MR<sup>®</sup> 79, MR<sup>®</sup> 85 MR<sup>®</sup> 88, MR<sup>®</sup> 3001, MR<sup>®</sup> 3002  
Remover: MR<sup>®</sup> 71, MR<sup>®</sup> 79  
Magnetic powder: All MR<sup>®</sup> magnetic powders and suspensions

### Delivery Form



\*\*technical changes reserved!\*\*